

PQ.touch – Web-Panel

With the PQ.touch web panel, the web server of all network-capable universal measuring devices and other network participants can be visualised. The web panels have an automation browser and are thus customisable. PQ.touch convinces with its elegant design and the capacitive touch display.




Download
data sheet




Designation	PQ.touch 7	PQ.touch 10	PQ.touch 15
Item number	17.16.3107	17.16.3110	17.16.3115
Display size	7"	10.3"	15.6"
Display resolution	1024 x 600 Pixel	1280 x 800 Pixel	1366 x 768 Pixel
Display technology	Touch screen capacitive, TFT wide screen with 16 million colours		
Backlight	LED dimmable - 50,000 hours of use		
Brightness	500 cd/m ²		
Processor	ARM Cortex A9 Quad-Core		
RAM working memory	2 GB DDR3L		
Flash memory	8 GB eMMC		
Browser	Automation Browser, Google Chrome, Android WEBViewer		
Communication	1 x RS232/485 + 1 x 1 RJ45 Ethernet GB + 1 x RJ45 Ethernet 10/100 MB + 2 x USB 2.0 + 1 x SDHC card slot + 1 x mini PCI express slot		
Supply voltage	12 ... 32 V DC		
Internal consumption	7 W		
Operation temperature	-10 ... 50 °C		
Storage temperature	-20 ... 65 °C		
Front protection class	IP 66		
Weight	0.5 kg	2.5 kg	3.7 kg
Certificates	CE / EN60068-2-6 / EN60068-2-27 / humidity EN60068-2-30		

PQ-touch 7 dimensional drawings

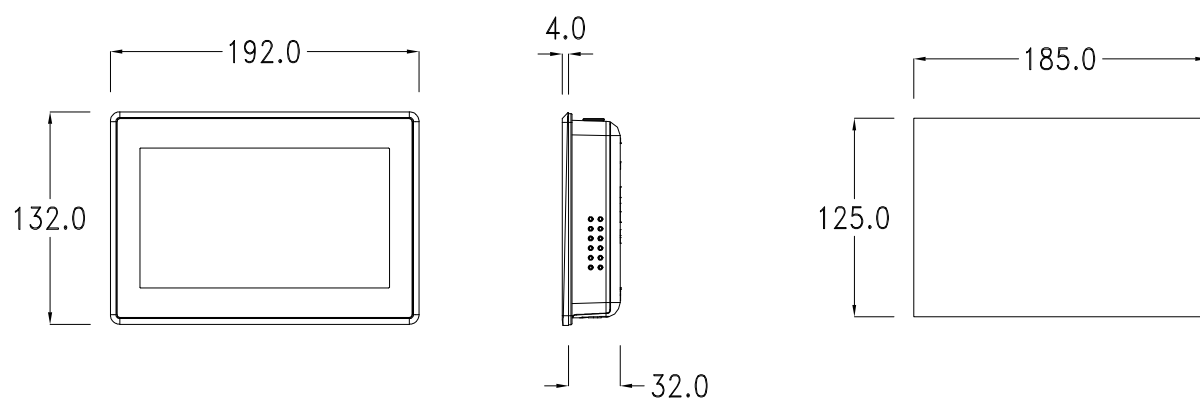

PQ.touch 10 dimensional drawings

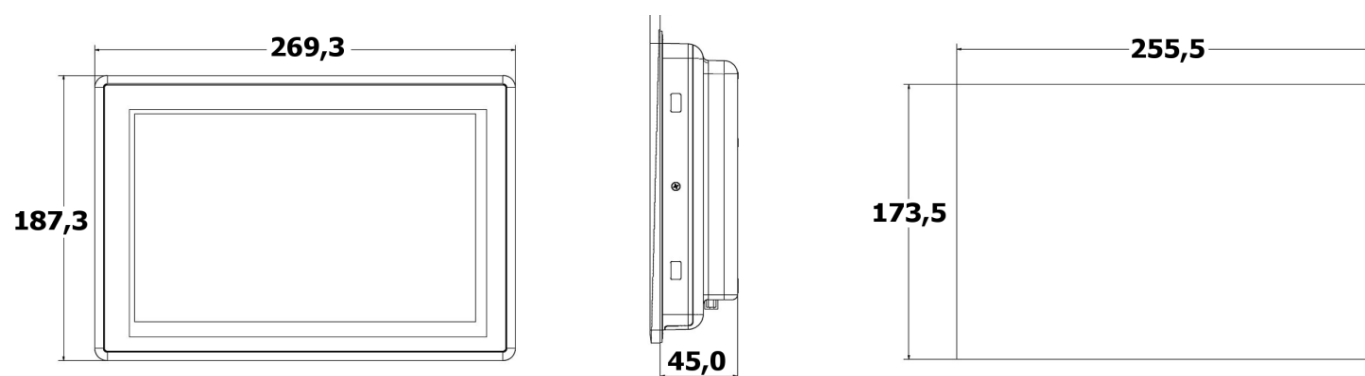

PQ.touch 15 dimensional drawings

