


## Series clamping systems

Download  
data sheet



### TOPJOB®S - Terminal block - Series 2007 - for transformers

- With the TOPJOB®S terminal block, you can short-circuit current transformers, for example. A measuring device can only be connected to the test socket on the measuring device side after the circuits have been completely disconnected.
- For mounting on DIN35 rail
- Intuitive and convenient operation as well as precise display of the switching status
- High functionality with small dimensions
- All 2007 Series terminals are rated for 30 A/500 V IEC and 300 V UL.
- With a terminal width of 8 mm, the maximum connectable cross-section is 10 mm<sup>2</sup> (AWG 8) for single and fine stranded conductors and 6 mm<sup>2</sup> (AWG 10) when using wire end ferrules.
- Touch-proof test sockets for test plugs Ø 4 mm on the transformer and meter side

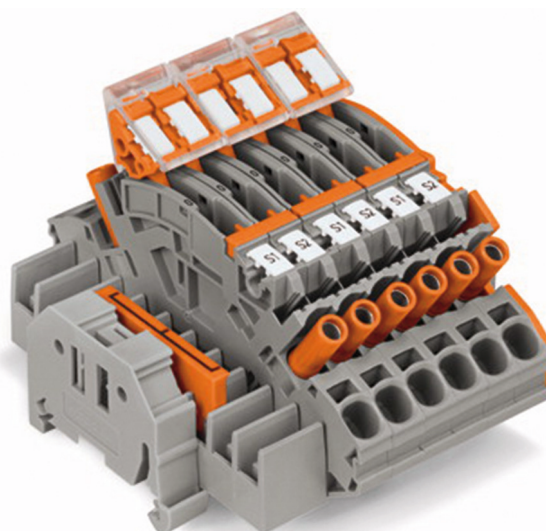

## Device types

| Designation                                                                              | TOPJOB®S 8875               | TOPJOB®S 8877               |
|------------------------------------------------------------------------------------------|-----------------------------|-----------------------------|
| Item number                                                                              | 18.88.0075                  | 18.88.0077                  |
| Field of application                                                                     | 3-phase transformer circuit | 4-phase transformer circuit |
| Construction width                                                                       | 70.0 mm                     | 86 mm                       |
| Colour                                                                                   | Grey                        | Grey                        |
| Screwless end clamp, 10 mm wide                                                          | 2                           | 2                           |
| 2-wire protective conductor terminal, with touch-proof test socket, for test plug Ø 4 mm | 6                           | 8                           |
| End and separating plate, 1.5 mm thick, without sealing option                           | 1                           | 1                           |

## Technical data

|                                                         |                                       |
|---------------------------------------------------------|---------------------------------------|
| Pollution level (1)                                     | 3                                     |
| Rated voltage EN (1) [V]                                | 500                                   |
| Rated impulse withstand voltage (1) [kV]                | 6                                     |
| Connection technology 1                                 | Push-in CAGE CLAM®                    |
| Nominal cross section 1                                 | 6 mm <sup>2</sup>                     |
| single-wire, connectable 1                              | 0.5 - 10 mm <sup>2</sup> / 20 - 8 AWG |
| solid, directly pluggable 1                             | 1 - 10 mm <sup>2</sup> / 14 - 8 AWG   |
| Flexible with wire end ferrule without plastic collar 1 | 1.5 - 6 mm <sup>2</sup> / 16 - 10 AWG |
| Flexible with ferrule min., directly pluggable 1        | 1.5 mm <sup>2</sup> / 16 AWG          |
| Stripping length 1                                      | 13 - 15 mm / 0.51 - 0.59 in           |

Image: All rights reserved by WAGO

## Connection variants – Terminal block

